



Dérailleur

"TOUR

de

FRANCE"



SPARE PARTS

FITTING INSTRUCTIONS


DERAILLEUR




"TOUR
de
FRANCE"

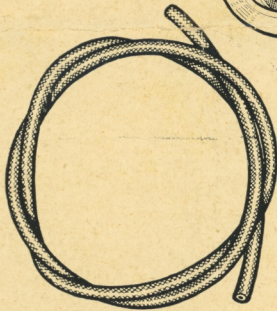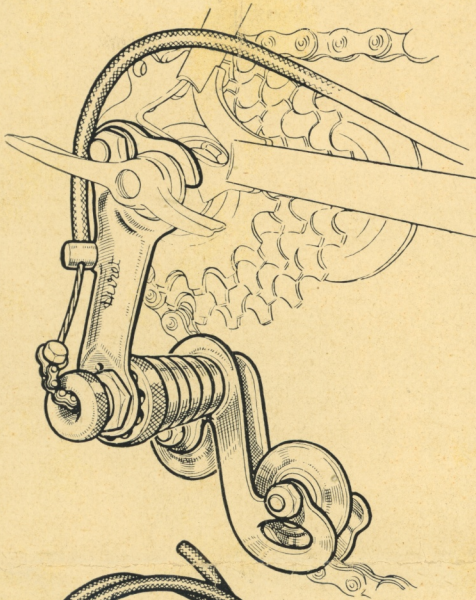

OUTERCASING



CABLE

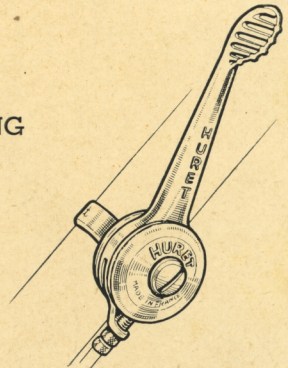


RIGHT HAND
SINGLE LEVER


FOR ORDERS please specify : a) speeds required - b) size of
chains - $1/2 \times 1/8$ or $1/2 \times 3/32$

SPARE PARTS

DERAILLEUR "TOUR DE FRANCE"

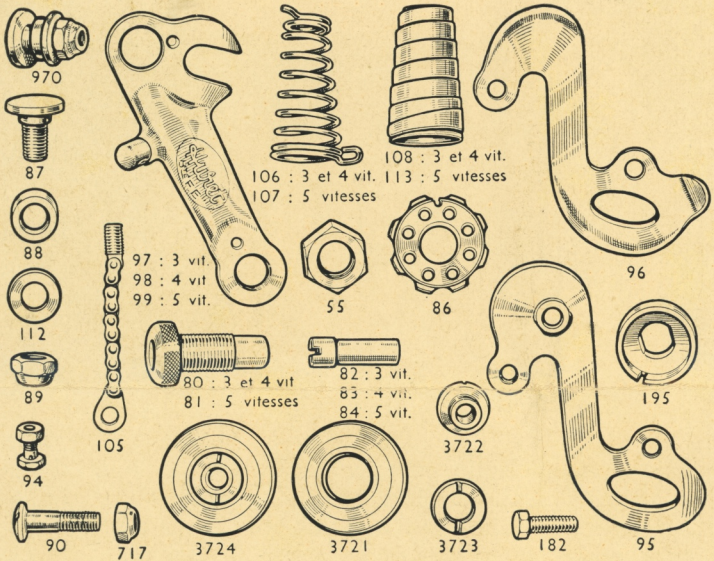


RIGHT HAND SINGLE LEVER

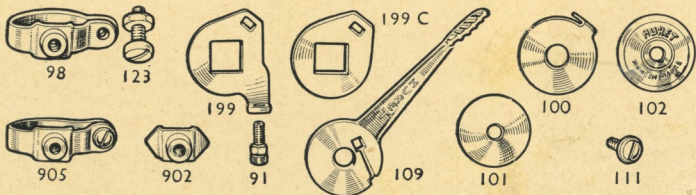

FOR ORDERS please specify the numbers

FITMENT

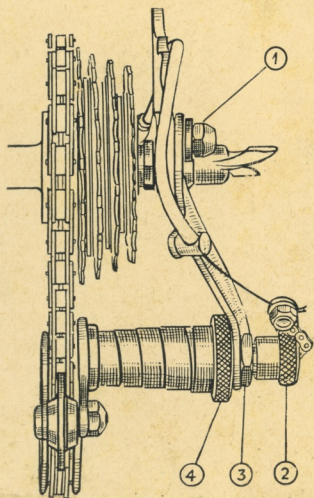

TOUR DE FRANCE

Fix in slotted rear fork end by means of nut n° 1.

SETTING

For use on large ratio sprocket tighten n° 2 knurled round adjusting nut until desired length of throw is obtained. For use on small ratio sprocket slaken n° 2, nut till functioning correctly and tighten locking nut n° 3 against rigid, arm.

AJUSTEMENT OF CHAIN TENSION

This is obtained by pressing and turning knurled locking ring n° 4 to the right to tighten on the left to slacken, taking care that the locating pin on the rigid arm is served into one of the EIGHT, ajusting holes.

CHAINE

It is important that the chain be rivetted. Spring links must not be used.

OILING must be done every month,
(chain, dérailleur-gear and cable.)